

# Euclidean & Geodesic Distance between a Facial Feature Points in Two-Dimensional Face Recognition System

Rachid AHDID<sup>1</sup>, Khaddouj TAIFI<sup>1</sup>, Said SAFI<sup>1</sup> and Bouzid MANAUT<sup>2</sup>

<sup>1</sup>Department of Mathematics and Informatics, Sultan Moulay Slimane University, Beni Mellal, Morocco

<sup>2</sup>Departement of Physics, Sultan Moulay Slimane University, Beni Mellal, Morocco

**Abstract:** *In this paper, we present two feature extraction methods for two-dimensional face recognition. Our approaches are based on facial feature points detection then compute the Euclidean Distance between all pairs of this points for a first method (ED-FFP) and Geodesic Distance in the second approach (GD-FFP). These measures are employed as inputs to a commonly used classification techniques such as Neural Networks (NN), k-Nearest Neighbor (KNN) and Support Vector Machines (SVM). To test the present methods and evaluate its performance, a series of experiments were performed on two-dimensional face image databases (ORL and Yale). The experimental results also indicated that the extraction of image features is computationally more efficient using Geodesic Distance than Euclidean Distance.*

**Keywords:** *Face recognition, landmarks, Euclidean Distance, Geodesic Distance, Neural Networks, k-Nearest Neighbor and Support Vector Machines.*

## 1. Introduction

Biometric face recognition technology has received significant attention in the past several years due to its potential in different applications. Automated human face recognition was applied in different fields including automated secured access to machines and buildings, automatic surveillance, forensic analysis, fast retrieval of records from databases in police departments, automatic identification of patients in hospitals, checking for fraud or identity theft, and human-computer interaction [1, 5].

In recent years face recognition has received substantial attention from both research communities and the market, but still remained very challenging in real applications. A lot of face recognition algorithms, along with their modifications, have been developed during the past decades. Automatic recognition of human faces based on the 2D images processing is well developed this last years, and several techniques have been proposed. We find several global, local and hybrids methods: The Principal Component Analysis PCA also known under the name eigenfaces [2, 3], two-dimensional version of PCA noted 2DPCA [4], the Stochastic Approach in [6, 7]. In 1991 M. A. Turk et al. implemented The Principal Component Analysis (PCA) approach also known under the name Eigenfaces [27]. In 2001 G.D. Guo proposed to tackle multi-class classification problem for a K-class classification test, Optimal-Pairwise Coupling (O-

PWC) SVM [28]. In 2003 J. Lu et al. implemented a method combines the strengths of the D-LDA and F-LDA approaches, while at the same time overcomes their shortcomings and limitations [31]. Two-dimensional version of Principal Component Analysis noted (2DPCA) was presented by J. Yang et al. in 2004 for image representation [4]. M. Visani et al. are proposed Two-Dimensional Linear Discriminant Analysis (2DO-LDA) in 2004, this approach is chosen to jointly maximize the mean variation between classes and minimize the mean of the variations inside each class [8]. H. Cevikalp et al. proposed an approach called the Discriminative Common Vector method based on a variation of Fisher's Linear Discriminant Analysis for the small sample size case in 2005 [29]. Linear Discriminant Analysis LDA also known under the name Fisherfaces was proposed by L. Bedoui et al in 2008 [5]. In 2010 M. Agarwalet al. implemented a method combines Principal Component Analysis (PCA) and Neural Network(NN) [32]. In 2012 V. More et al, used modified fisher face and fuzzy fisher face FFLD for a person is identified with face [33]. In 2014 W. Xu et al. proposed an integrated algorithm based on the respective advantages of wavelets transform (WT), 2D Principle Component Analysis (PCA) and Support Vector Machines (SVM) [34].

On the other hand, there are methods of 3D face recognition based on the use of three-dimensional information of the human face in the 3D space. Existing approaches that address the problem of 3D

face recognition can be classified into several categories of approaches: geometric or local approaches 3D, Bronstein et al propose a representation based on the isometric nature of the facial surface [9, 10]. Samir et al use 2D and 3D facial curves for analyzing the facial surface [11, 12]. Holistic approaches, Heseltine et al have developed two approaches applying the representations ACP in Threedimensional face [13], Cook et al present a robust method for facial expressions based on Log Gabor models from images of deep [14]. There are some other approaches based on face Segmentation can be found in [15, 16, 17].

The objective of this paper is to achieve a two-dimensional face recognition system by the facial feature points detection and compute a distance between all this points using Euclidean Distance (ED) in Euclidean geometry and Geodesic Distance (GD) in Riemannian geometry. These measures are employed as inputs to a commonly used classification techniques such as Neural Networks (NN), k-Nearest Neighbor (KNN) and Support Vector Machines (SVM). The rest of this paper is organized as follows: Section 2 describes the methodology of the proposed method with its stages: Face Feature Points (FFP) detection, Eclidean Distance between all pairs of Face Feature Points (ED FFP) and Geodesic Distance between all pairs of Face Feature Points (GD-FFP) and classification algorithms (NN, KPPV and SVM). Section 3 includes the simulation results with comparative study of the performance of our face authentication with respect to the performance obtained in other 2D face recognition systems. Section 4 draws the conclusion of this paper and possible points for future work.

## 1. Methodology

In order to overcome the limitations in the existing methods of 2D face recognition, we propose our geometric approach based on face feature points detection and compute a Geodesic and Euclidean distance between all this points. The figure 1 shows the proposed method as follows.

The presented method starts by detecting 20 facial feature points using Gabor Feature Based Boosted Classifiers algorithm [19]. Then, we use the Euclidean geometry for compute 190 Euclidean distances between all possible pairs the 20 fiducial points, for our first algorithm. The second algorithm is based on the computation of 190 geodesic distances between all 20 face feature points using Fast Marching algorithm for resolving the Eiconal equation in Riemannian geometry. The Euclidean and Geodesic distances

computed respectively  $D_e$  and  $D_g$  presents the input vectors of classification algorithms used in our automatic 2D face recognition systems. In the classifying step, we use: Neural Networks (NN), K-Nearest Neighbor (KNN) and Support Vector Machines (SVM).

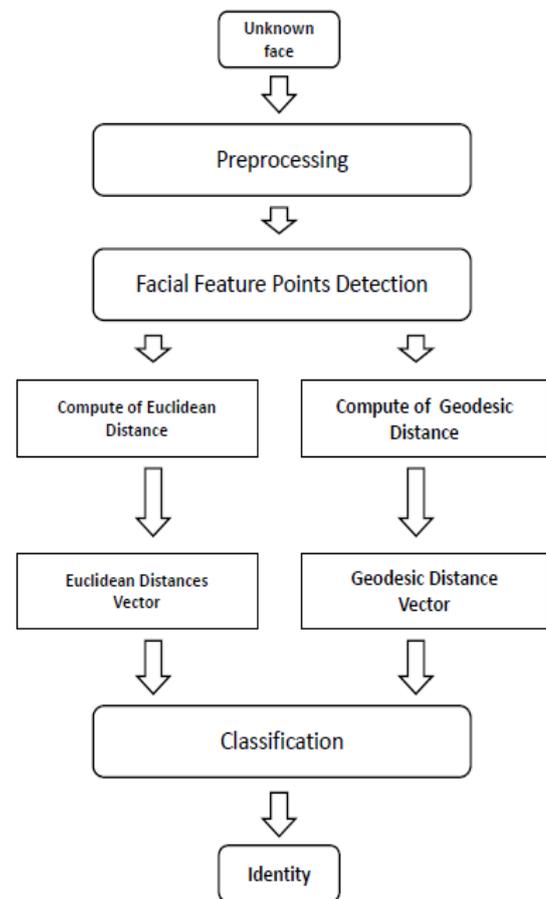


Figure 1. Methodology Architecture.

### 2.1. Facial Feature Points Detection

Automatic detection of facial feature points plays an important role in applications such as facial feature tracking, human-machine interaction, and face recognition [20]. A feature point is a point that constitutes an interesting part of an image. It can be either a corner, or an edge, or a blob etc. In this paper, we use 20 facial feature points such as: Outer corner of the left eye, Outer corner of the right eye, Inner corner of the left eye, Inner corner of the right eye, Bottom of the left eye, Bottom of the right eye, Top of the left eye, Top of the right eye, Inner corner of the left eyebrow, Inner corner of the right eyebrow, Outer corner of the left eyebrow, Outer corner of the right eyebrow, Left nose corner, Right nose corner, Top of the nose, Left mouth corner, Right mouth corner, Mouth top, Mouth bottom and Chin [19]. Figure 2

shows this 20 facial feature points on two images: (a) image from ORL database and (b) image from YaleB database.

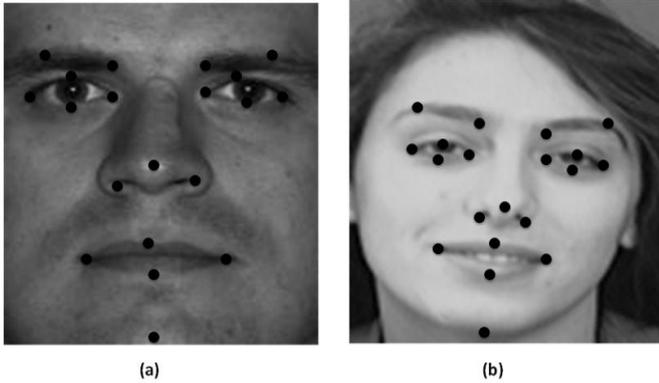


Figure 2. Two examples of face feature points detection using ORL and YaleB 2D face database images: (a) ORL image; (b) YaleB image

Each year more and more efficient and accurate algorithms are being proposed. Mostly these algorithms are either for detecting some feature points in an image, or tracking movement in a videostream. Locating of 20 facial feature points in images of faces is an important stage for our automatic 2D face recognition approach. For this task, we use Gabor Feature Based Boosted Classifiers algorithm proposed by Danijela Vukadinovic et al in [19]. The method consists of 4 steps: Face Detection using Haar feature based GentleBoost classifier [18], Region Of Interest (ROI) Detection, Feature Extraction based on Gabor filtering, and Feature Classification using Gentle Boost classifier. Figure 3 presents the four steps for twenty facial feature points detection.

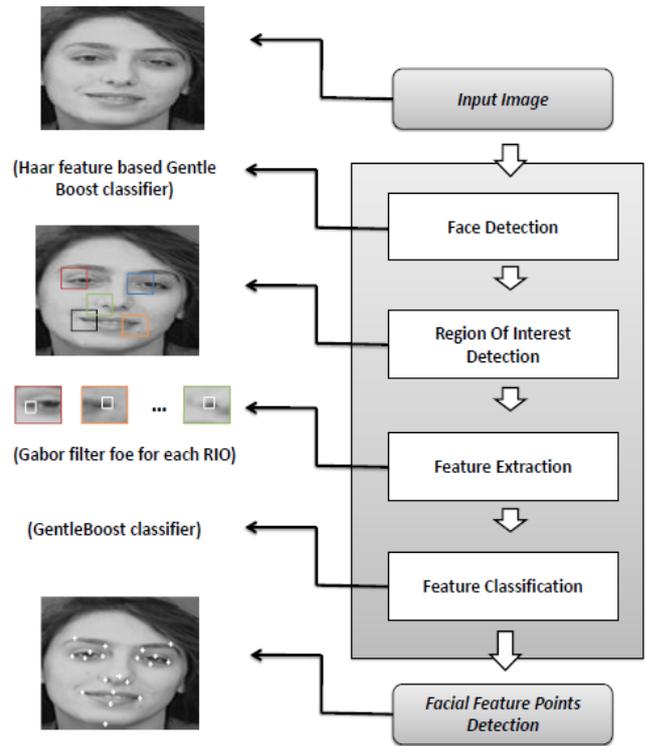


Figure 3. Automatic 20 Facial Feature Points detection steps.

## 2.2. Euclidean Distance

The Euclidean distance or Euclidean metric is the ordinary distance between two points that one would measure with a ruler, and is given by the Pythagorean formula. It is shown in Figure 4. This figure shows two examples of three Euclidean distances between facial feature points using ORL and YaleB images:  $d_1$  is the Euclidean distance between Top of the nose and Outer corner of the right eye,  $d_2$  is the Euclidean distance between Top of the nose and Inner corner of the left eye and  $d_3$  is the Euclidean distance between Top of the nose and Left mouth corner.

By using this formula as distance, Euclidean space becomes a metric space. The Euclidean distance between points  $P$  and  $Q$  is the length of the line segment connecting them  $[PQ]$ . In Cartesian coordinates, if  $P = (p_1, p_2, \dots, p_n)$  and  $Q = (q_1, q_2, \dots, q_n)$  are two points in Euclidean  $n$ -space, then the distance from  $P$  to  $Q$ , or from  $Q$  to  $P$  is given by:

$$d(P, Q) = \sqrt{\sum_{i=1}^n (p_i - q_i)^2} \quad (1)$$

In three-dimensional Euclidean space, the distance is:

$$d(P, Q) = \sqrt{(p_1 - q_1)^2 + (p_2 - q_2)^2 + (p_3 - q_3)^2} \quad (2)$$

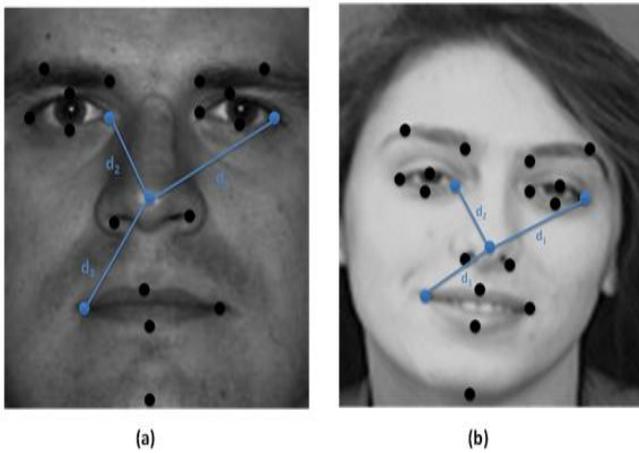


Figure 4. Two examples of three Euclidean distances between facial feature points using ORL and YaleB images: (a) ORL image; (b) YaleB image.

The Euclidean distance between landmarks is used by most authors as a morphometric measure. Once facial feature points are obtained from a facial image or a two-dimensional face, they select some significant distances between them and compute the corresponding Euclidean distances. Then these distances are used to compare faces for face recognition systems. The 190 Euclidean distances computed between all possible pairs the 20 facial feature points constitute a vector  $D_e$  of 190 of element.

$$D_e = \begin{bmatrix} d_1 \\ d_2 \\ \cdot \\ \cdot \\ \cdot \\ \cdot \\ d_{190} \end{bmatrix} \quad (3)$$

This vector give the human face features of 2D image and used as input of classification algorithm for our automatic face recognition system.

### 2.3. Geodesic Distance

The geodesic distance between two points'  $P$  and  $Q$  of 2D face surface is the shortest path between the two points while remaining on the facial surface. In the context of calculating the geodesic distance R. Kimmel and J.A. Sethian [21] propose the method of Fast Marching as a solution of the Eikonal equation.

The Eikonal equation is of the form:

$$|\nabla_u(x)| = F(x); \quad x \in \Omega \quad (4)$$

With:  $\Omega$  is an open set in  $R^n$  housebroken limit,  $\nabla$  denotes the gradient and  $|\cdot|$  is the Euclidean norm.

The Fast Marching method is a numerical method for solving boundary value problems of the Eikonal equation [21, 22]. The algorithm is similar to the Dijkstra's algorithm [23]. In this work, we compute a geodesic distance on a facial surface, using the values of the surface gradient only [24].

The main step of the geodesic distance computing is the construction of the canonical form of a given surface (Facial surface). Let  $Img$  represent a 2D face image of ORL or YaleB database, we can represent mathematically  $Img$  as a plan  $P = (p_1, p_2)$ . To compute a geodesic distance the facial surface can be thought of as a parametric manifold, represented by a mapping  $F: R^2 \rightarrow R^3$  from the parameterization plan  $P = (p_1, p_2)$  to the manifold [A. M.Bronstein 2004]:

$$F(P) = F(p_1, p_2) = (p_1, p_2, p_3(p_1, p_2)) \quad (5)$$

The metric tensor  $g_{ij}$  of the manifold is given by:

$$g_{ij} = \begin{bmatrix} g_{11} & g_{12} \\ g_{21} & g_{22} \end{bmatrix} = \begin{bmatrix} X.X & X.Y \\ Y.X & Y.Y \end{bmatrix} \quad (6)$$

The geodesic distance between two points on a surface is calculated as the length of the shortest path connecting the two points. Using the Fast Marching algorithm on the surface gradient, we can compute the geodesic distance between all possible pairs of the 20 facial feature points detected.

The geodesic distance  $\delta_{P,Q}$  between two points  $P$  and  $Q$  is approximated by:

$$\delta_{P,Q} = \min \gamma(\beta(P, Q)) \quad (7)$$

With:  $\beta(P, Q)$  is the path between  $P$  and  $Q$  according to the surface  $S$  of the 2D face and  $\gamma(\beta(p_0, p))$  is the path length.

The distance element on the manifold is given by [25]:

$$\delta_{ij} = \sqrt{g_{ij} \xi^i \xi^j} \quad (8)$$

With:  $g_{ij}$  is computed by equation (6);  $i=1$  or  $2$  and  $j=1$  or  $2$ ;  $\xi^1 = P$  and  $\xi^2 = Q$ .

Figure 5 shown two examples of three geodesic distances between facial feature points using ORL and YaleB database image:  $\delta_1$  is the geodesic distance between Top of the nose and Outer corner of the right eye,  $\delta_2$  is the geodesic distance between Top of the nose and Inner corner of the left eye and  $\delta_3$  is the geodesic distance between Top of the nose and Left mouth corner.

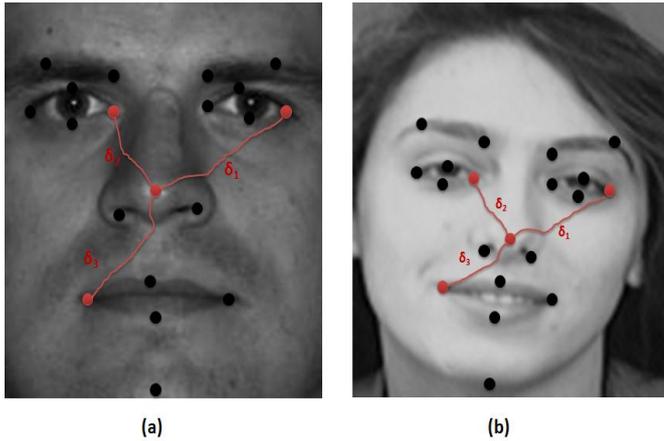


Figure 5. Two examples of three Geodesic distances between facial feature points using ORL and YaleB images: (a) ORL image; (b) YaleB image.

We use the Geodesic distances between facial feature points to realize our automatic face recognition systems. Once facial feature points are obtained from a facial image or a two-dimensional face, they select some significant distances between them and compute the corresponding geodesic distances. Then these distances are used to compare faces for face recognition systems. The 190 geodesic distances computed between all possible pairs the 20 facial feature points constitute a vector  $D_g$  of 190 of element.

$$D_g = \begin{bmatrix} \delta_1 \\ \delta_2 \\ \cdot \\ \cdot \\ \cdot \\ \delta_{190} \end{bmatrix} \quad (9)$$

This vector give the human face features of 2D image and used as input of classification algorithm for our automatic face recognition system.

## 2. Simulation Results

The experiments are performed to assess the effectiveness and robustness of our approaches (FFP-ED and FFP-GD) with respect to variations in lighting conditions, facial expression and head pose. And compare our two methods together and with the other methods that are applied in this area. Two face databases are used: ORL and YaleB. The first database was used to evaluate the performance of 2DPCA under conditions where the pose and sample size are varied. The second database was used to examine the system performance when both facial expressions and illumination are varied.

Firstly, we start our methods by detecting of 20 facial feature points using Gabor Feature Based Boosted Classifiers algorithm proposed by Danijela Vukadinovic. Secondly, we compute 190 Euclidean distances between all possible pairs the 20 fiducial points, for our first algorithm (FFP-ED), using the equation (2). For our second approach (FFP-GD), we use a Fast Marching algorithm for resolving an Eiconal equation in Riemannian geometry. The 190 Euclidean and geodesic distances computed, we allow obtaining vectors of 190 elements. Each vector represent the human face features of ORL or YaleB database and each vector element represents a Euclidean or geodetic distance between pairs of facial feature points. Therefore, we can represent each face by a vector of 190 elements. These vectors are used as inputs of the classification algorithms of our automatic 2D face recognition systems. Finally, we use three classification algorithms such as: Neural Networks (NN), K-Nearest Neighbor (KNN) and Support Vector Machines (SVM).

### 3.1. Databases

The ORL database contains 400 images of 40 individuals. For each person, we have 10 pictures in grayscale and standardized at a resolution of  $112 \times 92$  pixels. The YaleB database contains 2432 images of 38 people in 64 different lighting conditions. Each image has been normalized at a resolution of  $168 \times 192$  pixels. To realize our 2D face recognition systems, we use three classification algorithms such as: the Neural Networks (NN), K-Nearest Neighbor (KNN) and Support Vector Machines (SVM).

Twenty sample images of ORL and YaleB faces database are shown in Figure 6, the first and second lines shows ten sample images of deferent personnes of

ORL database and the third and last lines gives ten images of deferent personnes of YaleB database.



Figure 6. Twenty sample images of ORL and YaleB faces database. (First and second lines) Ten sample images of ORL database, (Third and last lines) Ten images of YaleB database.

### 3.2. Experiments on the ORL Database

The ORL database contained 400 2D facial models of 40 subjects. The experiments were performed using the first five image samples per class for training, and the remaining images for test. Thus, the total number of training samples and testing samples were both 200 images.

In this first experiment, we realize two 2D face recognition systems using ORL database images. Our systems are based on two algorithms such as: Euclidean Distance between all pairs of Face Feature Points (ED-FFP) and Geodesic Distance between all pairs of Face Feature Points (GD-FFP).

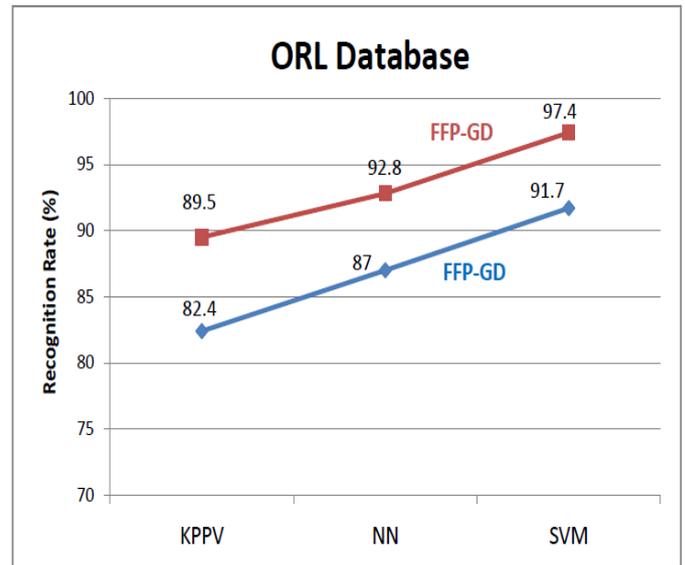


Figure 7. Recognition Rate for ORL images using ED-FFP and GD-FFP for feature extraction and three classification algorithms (NN, KNN and SVM).

Figure 7 shows the experiment results of recognition rate obtained for ORL images using a ED-FFP and GD-FFP for feature extraction step. In classification steps we applied three weak classifiers, namely, k-Nearest Neighbor (KNN), Neural Networks (NN) and Support Vector Machines (SVM). We achieved average recognition rates of 82.4%, 87% and 91.7% for our first method Euclidean Distance between all pairs of Face Feature Points (ED-FFP) using , respectively, KNN, NN and SVM as classificateurs. And 89.5%, 92.8% and 97.4% for our second method Geodesic Distance between all pairs of Face Feature Points (ED-FFP) using, respectively, KNN, NN and SVM .

### 3.3. Experiments on the YaleB Database

In this first experiment, we use the YaleB database images for our face recognition systems. As last experiment, we use Euclidean Distance between all pairs of Face Feature Points (ED-FFP) and Geodesic Distance between all pairs of Face Feature Points (GD-FFP) for feature extraction step. The experiments were performed using the first ten image samples per class for training, and ten images for test. Thus, the total number of training samples and testing samples were both 380 images.

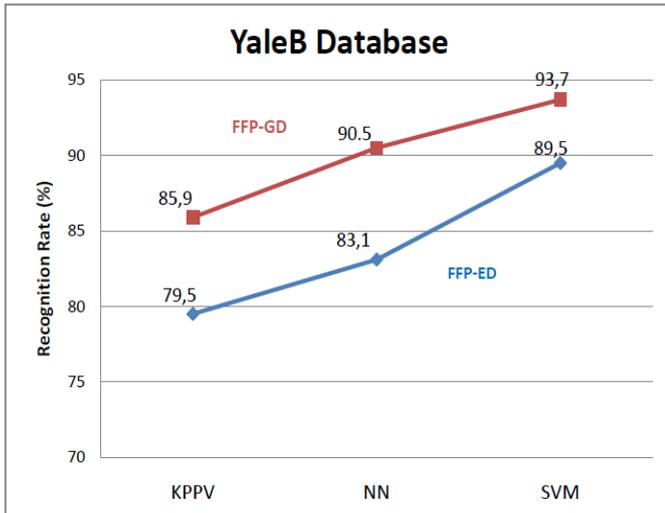


Figure 8. Recognition Rate for YaleB images using ED-FFP and GD-FFP for feature extraction and three classification algorithms (NN, KNN and SVM).

Figure 8 shows the experiment results of recognition rate obtained for YaleB images using a ED-FFP and GD-FFP for feature extraction step. In classification steps we applied three weak classifiers, namely, k-Nearest Neighbor (KNN), Neural Networks (NN) and Support Vector Machines (SVM). We achieved average recognition rates of 79.5%, 83.1% and 89.5% for our first method Euclidean Distance between all pairs of Face Feature Points (ED-FFP) using, respectively, KNN, NN and SVM as classifiers. And 85.9%, 90.5% and 93.7% for our second method Geodesic Distance between all pairs of Face Feature Points (GD-FFP) using respectively KNN, NN and SVM.

### 3.4. Comparison of Experiment Results

In this paper, two face recognition algorithms ED-FFP and GD-FFP have been described. These methods have been verified on the ORL and YaleB dataset, and the testing protocols used in the experiments are almost the same, so that a direct comparison of the results reported in these works is possible. In Figure 8, we give a comparison of these face recognition algorithms.

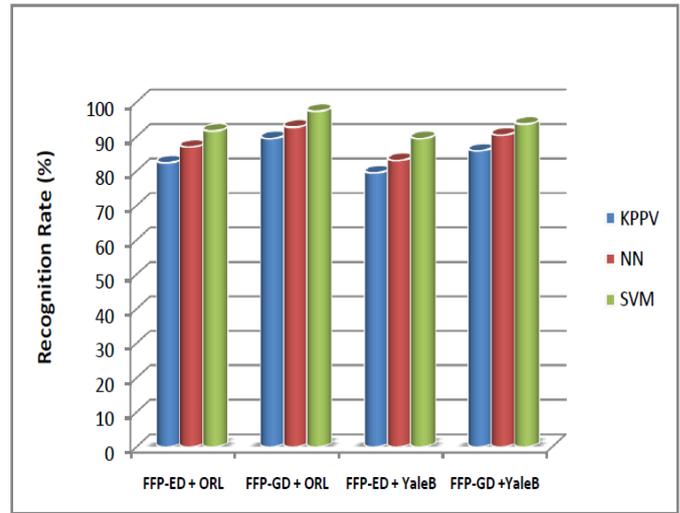


Figure 9. Comparison of our 2D face recognition methods using ORL and YaleB Databases.

Figure 9 gives a comparison recognition rate of these four features extraction algorithms ED-FFP and GD-FFP using ORL and YaleB database images. This comparison shows the best recognition rate (97.4%) was presented for GD-FFP using SVM classifier, and then this method was also better than ED-FFP method. In conclusion of this series of results, a summary table (Table I) compares the performance of our face authentication with respect to the performance obtained in other 2D face recognition systems.

We can notice that the performance of our automatic 2D face recognition system using Geodesic Distance between all pairs of Face Feature Points (GD-FFP) and Support Vector Machines (SVM), In addition our system (GD-FFP+SVM) is perfect in all assessment. Our goal was to improve 2D faces recognition system we affirm based on the results that our goal is achieved.

Table1. Comparatives study of our methods and other methods obtained in other work systems.

Date	Reference	Method	Database	Reported performance
1991	[M. Turk 1991]	Eigenface	ORL	90,00%
2001	[G.D. Guo 2001]	O-PWC +SVM	ORL	96,79%
2005	[Cevikalp 2005]	DCV	Yale	97,33%
2003	[Lu et 2003]	DF-LDA	ORL	96,00%
2004	[J. Yang 2004]	2DPCA	ORL	96,00%
2004	[M. Visani 2004]	2DO-LDA	FERET	94,40%
2010	[M. Agarwal 2010]	PCA+NN	ORL	97,01%
2012	[V. More 2012]	FFLD	ORL	95,50%
2012	[V. More 2012]	FFLD	Yale	94,80%
2014	[W. Xu et 2014]	WT+2DPCA +SVM	ORL	97,10%
2015	[R. Ahdid 2015]	GD+LDA	YaleB	92,00%
2015	[R. Ahdid 2015]	GD+LDA	ORL	96,20%
2015	[R. Ahdid 2015]	GIH	YaleB	93,70%
2015	[R. Ahdid 2015]	GIH	ORL	94,50%
2015	[R. Ahdid 2015]	I-GC	YaleB	91,70%
2015	[R. Ahdid 2015]	GD+PCA	YaleB	94,80%

2016	Our System	GD- FFP+SVM	ORL	97.40%
------	------------	----------------	-----	--------

## 5. Conclusions

In this paper, we have presented two automatic 2D face recognition system using two feature extraction algorithms such as: Eclidean Distance between all pairs of Face Feature Points (ED-FFP) and Geodesic Distance between all pairs of Face Feature Points (GD-FFP). For classification step we have used the k-Nearest Neighbor (KNN), Neural Networks (NN) and Support Vector Machines (SVM). The simulation results were performed on two face image databases: ORL and Yale face databases. The recognition rate across all trials was higher using ORL images than YaleB images. The simulation results also indicated that the extraction of image features is computationally more efficient using GD-FFP algorithm than ED-FFP algorithm. The Support Vector Machine (SVM) classifier is better than Neural Networks (NN) and k-Nearest Neighbor (KNN) classifiers in terms of recognition accuracy in all experiments. Finally, a comparative study was conducted between our methods in this paper with other methods proposed in this field of 2D face recognition.

## References

- [1] A. S. Gawali and P. R. R. Deshmukh: 3D Face Recognition Using Geodesic Facial Curves to Handle Expression, Occlusion and Pose Variations. (*IJCSIT*) *International Journal of Computer Science and Information Technologies*, Vol. 5 (3), 4284-4287. 2014.
- [2] L. Sirovich, and M. Kirby, "Application of the Karhunen-Love for the characterization of Human Faces", *IEEE Transactions on Pattern and Machine intelligence*, vol 12, no 1, pp. 103-108, 1990.
- [3] R. Alain., "Sparateurs Vaste Marge linaires", INSA Rouen –Dpartement ASI, 6 Mai 2009.
- [4] J. Yang, D. Zhang and D. Frangi., "Two Dimensional PCA: A New Approach to Appearance-Based Face Representation and Recognition". *IEEE Trans On PAMI*, 26(1), 1311-137. doi:10.1109/TPAMI; 2004.
- [5] L. Bedoui., Authentification de visages par la methode danalyse discriminante lineaire de Fischer, *Universit Mohamed Kheider de Biskra, Ingénieur d'Etat en Automatique*, 2008.
- [6] M. T. Laskri. and D. Chefrour., systme didentificationdes visages humains, *Dpartement d'Informatique*, Universit Badji Mokhtar Annaba. 2002.
- [7] P. K. Suri, and Verma, A. (2011, December). Appearance Based Robust Face Detection using Adaboost [*IJECT*]. *International Journal of Electronics and Communication Technology*, 58, 2462-49 ; 2011.
- [8] M. Visani., C. Garcia and J.M. Jolion, Two-Dimensional-Oriented Linear Discriminant Analysis for Face Recognition, *Proc. of the Int. Conf. On Computer Vision and Graphics ICCVG04, dans la srie Computational Imaging and Vision, Varsovie, Pologne*, 2004.
- [9] A. M. Bronstein., M. M. Bronstein. and R. Kimmel, Threedimensional face recognition, *International Journal of Computer, Vision* 64,1, PP. 5-30 2005.
- [10] A. M. Bronstein, M. M. Bronstein, and R. Kimmel, Expression-invariant representations of faces. *IEEE Transactions on Image Processing*, 16(1), 188-197. doi:10.1109/TIP.2006.884940 PMID:17283777; 2007.
- [11] C. Samir, A. Srivastava, M. Daoudi., and E. Klassen., An intrinsic framework for analysis of facial surfaces, *International Journal of Computer, vision*. 82,1 pp. 80-95, 2009.
- [12] C. Samir, M. Daoudi., A. Srivastava and M. Daoudi., Three-dimensional face recognition using shapes of facial curves. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 28(11), 1847-1857. doi:10.1109/TPAMI.2006.235 PMID:17063688 ; 2006.
- [13] T. Heseltine, N. Pears. and J. Austin., Three-dimensional face recognition: *An eigensurface approach*. *ICIP*, 26, 1421-1424. 2004.
- [14] J. Cook, A. V. Chandran., and C. B. Fookes., 3D face recognition using log-gabor templates, *British Machine Vision Conference Edinburgh, Scotland*, 2006.
- [15] P. Yan, and K. W. Bowyer, "Biometric recognition using 3D ear shape". *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 29(8), 1297-1308. doi:10.1109/TPAMI.2007.1067 PMID:17568136; 2007
- [16] H. Chen, and Bhanu, B. (2007). Human ear recognition in 3D. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 29(4), 718-737. doi:10.1109/TPAMI.2007.1005 PMID:17299227
- [17] H. Drira, B. B. Amor., A. Srivastava., and M. Daoudi., A Riemannian analysis of 3D nose shapes for partial human biometrics, *IEEE*



- International Conference on Computer Vision*, pp. 2050-2057, 2009.
- [18] I.R. Fasel, et al., GBoost: A generative framework for boosting with applications to realtime eye coding, *Computer Vision and Image Understanding*, in press. (For source code see <http://kolmogorov.sourceforge.net>.)
- [19] D. Vukadinovic and M. Pantic ; Fully Automatic Facial Feature Point Detection Using Gabor Feature Based Boosted Classifiers; *2005 IEEE International Conference on Systems, Man and Cybernetics Waikoloa, Hawaii October 10-12, 2005*.
- [20] S. Jahanbin, A. C. Bovik and H. Choi; Automated Facial Feature Detection from Portrait and Range Images. *15th IEEE International Conference on Image Processing*. P 2768 2771. 10.1109/ICIP.2008.4712368. 2008.
- [21] R. Kimmel and J. A. Sethian, Computing geodesic on manifolds, in Proc. *US National Academy of Science*, 1998, vol. 95, pp. 84318435. 1998.
- [22] E. Carlini, M. Falcone, N. Forcadel, R. Monneau: Convergence of a generalized fast-marching method for an eikonal equation with a velocity-changing sign. *SIAM J. Numer. Anal.* 46, 2920 2952 (2008).
- [23] E. W. Dijkstra, A Note on Two Problems in Connection with Graphs, *Numerische Mathematik*, 1 (1959), pp. 269271, 1959.
- [24] A. M. Bronstein, M. M. Bronstein, E. Gordon, R. Kimmel: Fusion of 2D and 3D Data in Three-Dimensional Face Recognition. *Image Processing, 2004. ICIP '04. 2004 International Conference on (Volume: 1)*, IEEE, p.p: 87 - 90. (2004).
- [25] A. M. Bronstein, M. M. Bronstein, A. Spira, R. Kimmel: Face Recognition from Facial Surface Metric, *Lecture Notes in Computer Science Volume 3022, 2004, Springer Berlin Heidelberg*, p.p: 225-237. (2004).
- [26] R. Ahdid, S. Safi and B. Manaut, Methods of Geodesic Distance in Two-Dimensional Face Recognition, *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol:9, No:6, 2015*.
- [27] M. Turk and A. Pentland, Eigenfaces for Recognition, *Journal of Cognitive Neuroscience*, vol 3no 1, pp. 71-86. 1991.
- [28] G.D. Guo, H.J. Zhang, and S.Z. Li., Pairwise face recognition in Proceedings of 8th *IEEE International Conference on Computer Vision. Vancouver, Canada, July 9-12, 2001*.
- [29] H. Cevikalp., M. Neamtu., M. Wilkes, A. Barkana.: Discriminative common vectors for face recognition. *IEEE Trans. Pattern Anal. Machine Intell.* 27 (1), 413. 2005.
- [30] R. Ahdid, K. Taifi, M. Fakir, S. Safi and B. Manaut, Two-Dimensional Face Recognition Methods Comparing with a Riemannian Analysis of Iso-Geodesic Curves, *Journal of Electronic Commerce in Organizations*, Copyright 2015, IGI Global. *Copying or distributing in print or electronic forms without written permission of IGI Global is prohibited*, DOI: 10.4018/JECO.2015070102, 2015.
- [31] J. Lu, J., N. P. Kostantinos, N. V. Anastasios: Face recognition using LDA-based algorithms. *IEEE Trans. Neural Networks* 14 (1), 195200.2003.
- [32] M. Agarwal, N. Jain, M. Kumar and H. Agrawal, Face Recognition Using Eigen Faces and Artificial Neural Network, *International Journal of Computer Theory and Engineering*, Vol. 2, No. 4, August, 1793-8201, 2010.
- [33] V. More and A. Wagh, Improved Fisher Face Approach for Human Recognition System using Facial Biometrics, *International Journal of Information and Communication Technology Research*, Volume 2 No. 2, February 2012.
- [34] W. Xu and E. J. Lee, Face Recognition Using Wavelets Transform and 2D PCA by SVM Classifier, *International Journal of Multimedia and Ubiquitous Engineering*, Vol.9, No.3, pp.281 -290, (2014).



**Rachid AHDID** obtained the B.Sc. degree in Physics and M.Sc. degree from Faculty of Science and Technics, in 2007 and from Faculty of Science and Technics Beni Mellal, Morocco, in 2012, respectively. Now he is Ph.D. student and his research interests include face recognition using Riemannian geometry. Email: r.ahdid@usms.ma Department of Mathematics and Informatics Beni Mellal, Morocco.



**Said Safi** received the B.Sc. degree in Physics (option Electronics) from Cadi Ayyad University, Marrakech, Morocco in 1995, M.Sc. degree from

Chouaib Doukkali University and Cadi Ayyad University, in 1997 and 2002, respectively. He has been a Professor of information theory and telecommunication systems at the National School for applied Sciences, Tangier, Morocco, from 2003 to 2005. Since 2006, he is a Professor of applied mathematics and programming at the Faculty of Science and Technics, Beni Mellal, Morocco. In 2008 he received the Ph.D. degree in Telecommunication and Informatics from the Cadi Ayyad University. His general interests span the areas of communications and signal processing, estimation, time-series analysis, and system identification – subjects on which he has published 14 journal papers and more than 60 conference papers. Current research topics focus on transmitter and receiver diversity techniques for single- and multi-user fading communication channels, and wide-band wireless communication systems. E-mail: safi.said@gmail.com Department of Mathematics and Informatics Beni Mellal, Morocco.

**Bouzid Manaut** received the B.Sc.degree in Physics (Theoretical Physics) from Cadi Ayyad University, Marrakech, Morocco in 1999, M.Sc. and Doctorate degrees from Cadi Ayyad University and Moulay Ismail University, in 2002 and 2005, respectively. Professor of theoretical Physics from 2006 to now at the Polydisciplinary Faculty, Beni Mellal, Morocco. Ph.D. degree in Theoretical Physics from the Faculty of Science and Technics, USMS, Beni Mellal, Morocco. Current research topics focus on Theoretical Physics.